

# Selector Door™

Steel Model



**For  
Secure  
Single  
Transaction  
Access**  
incorporating a  
selectable 'free  
passage' mode








**TRANSACTION  
CONTROL  
TECHNOLOGIES**

(SA)(Pty) Ltd

Reg.No. 2001/008728/07

**MORE THAN A SECURITY SOLUTION**

Tel: +27 11 888 1210 • Fax: +27 11 888 1625 • E-mail: [solutions@tct.co.za](mailto:solutions@tct.co.za)  
Web: [www.tct.co.za](http://www.tct.co.za) • PO Box 2723, Northcliff, 2115, South Africa  
An ISO 9001:2000 Company International patents registered

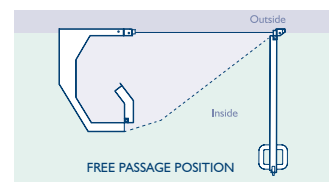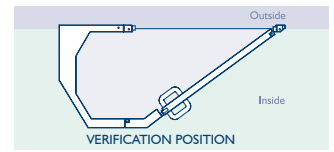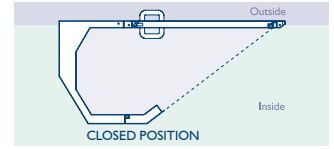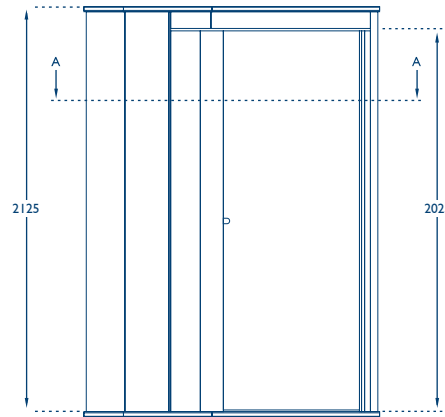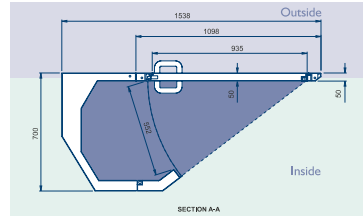

**SOME OF OUR  
DISTINGUISHED CLIENTS:**

**ABSA Bank**  
(South Africa)

**Standard Bank**  
(South Africa)

**First National Bank**  
(South Africa)

**Citi Bank**  
(South Africa)

**Bank of Botswana**

**South African Reserve Bank**

**South African Department  
of Justice**

**SITA**

**Letseng Diamond Mine**

**South African Government  
Buildings**

With over 1 500 installations,  
**Selector Door™** has  
become the definitive standard  
for secure single person access  
control into high security areas

**Secure Single Person Entry** – Only one person gains access on verified credentials at one time. This is achieved through both physical constraint & a range of electronic sensing devices.

**Controlled Free Passage Mode** – This 90° opening mode allows free passage for wheelchairs, bulk goods & also serves as an emergency escape.

**Retrofitable** – The **Selector Door™** is designed to fix to the inside of an existing opening or can fit in a purpose built opening.

**PLC Controlled** – The logic of the door operation is controlled by a proprietary PLC which in addition to the control function facilitates the integration of biometric reading devices, keypads & cameras as well as various other external access control devices & alarm systems.

**Models** - The **Selector Door™** is available in the **Steel Model** as depicted here, a Glass and Aluminium version and the top of the range **Versamaxflex™ Model**.

- Door offers handgun bullet resistance with an option of higher penetration resistance.
- Bullet-resistant viewing window option.
- Proprietary “dual secure rebate” & double skin construction.
- Powder coated to client colour specification, with additional cladding option to match surrounding aesthetic finishes.
- Triple locking & keypad entry as standard, with optional biometric access.
- Multiple point fixing to brickwork & drywall (H-Frame frame required for drywall installation).
- Optional clamping frame available for non-standard brickwork or drywall.
- Clear opening width of 920mm.
- Patented design.